



280 mm
11 in

AXIAL MOTOR-FAN - ELETTOVENTILATORE ASSIALE

PN: 6005.XXXX

Puller / Pusher

⚡ 24 V
D.C.

MOTOR DIMENSION

DIMENSIONE MOTORE



78 mm

MOTOR TYPE

TIPO MOTORE

AE6407 - Max 150 W

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ² O	mm H ² O	Pa	m ³ /h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph		A
0,0	0,0	0	1776	1048	4,61	1,0	25	245			10,0
0,1	2,5	25	1662	981	4,90	0,9	22,5	221			9,0
0,2	5,0	49	1587	936	5,27	0,8	20	196			8,0
0,3	7,5	74	1484	876	5,61	0,7	17,5	172			7,0
0,4	10,0	98	1352	798	5,85	0,6	15	147			6,0
0,5	12,5	123	1182	697	5,91	0,5	12,5	123			5,0
0,6	15,0	147	941	555	5,79	0,4	10	98			4,0
0,7	17,5	172	688	406	5,52	0,3	7,5	74			3,0
0,8	20,0	196	215	127	4,98	0,2	5	49			2,0
						0,1	2,5	25			1,0
						0,0	0	0	0	0	
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP6043						m³/h 0 250 500 750 1000 1250 1500 1750 2000 cfm 0 148 295 443 590 738 885 1033 1180					

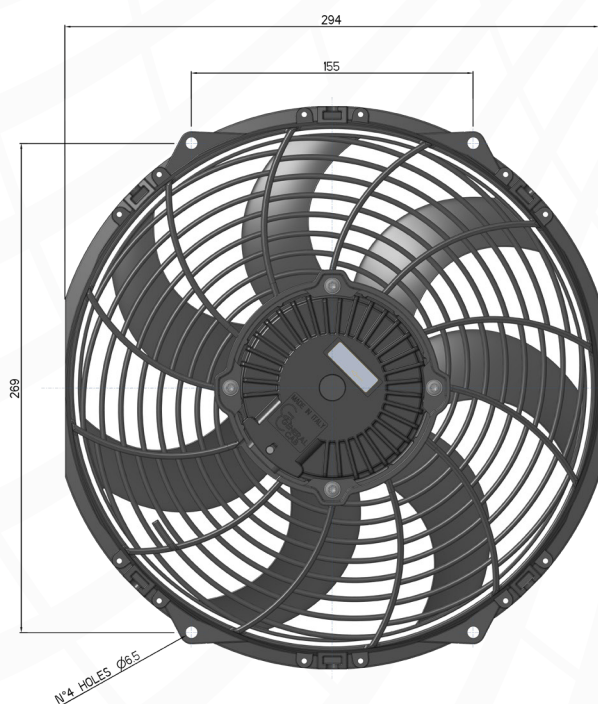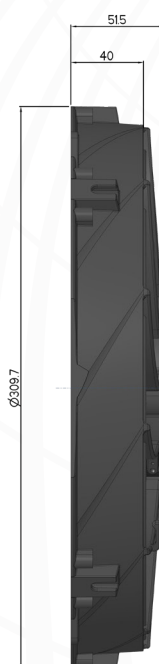

Ingress Protection Grade
IP68, IP6K9K

Grado di protezione
IP68, IP6K9K

Available connectors
AMP, Delphi, YAZAKI

Connettori disponibili
AMP, Delphi, YAZAKI