



167 mm
7 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0163

Pusher/Soffiante


24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 70 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	486	287	2,50	1,0	25	245		5,0	
0,1	2,5	25	445	263	2,50	0,9	22,5	221		4,5	
0,2	5,0	49	405	239	2,50	0,8	20	196		4,0	
0,3	7,5	74	386	228	2,53	0,7	17,5	172		3,5	
0,4	10,0	98	368	217	2,57	0,6	15	147		3,0	
0,5	12,5	123	285	168	2,51	0,5	12,5	123		2,5	
0,6	15,0	147	197	116	2,44	0,4	10	98		2,0	
0,7	17,5	172	166	98	2,51	0,3	7,5	74		1,5	
0,8	20,0	196	144	85	2,60	0,2	5	49		1,0	
						0,1	2,5	25		0,5	
						0,0	0	0		0	
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP4509						m³/h 0 75 150 225 300 375 450 525 600 cfm 0 44 89 133 177 221 266 310 354					

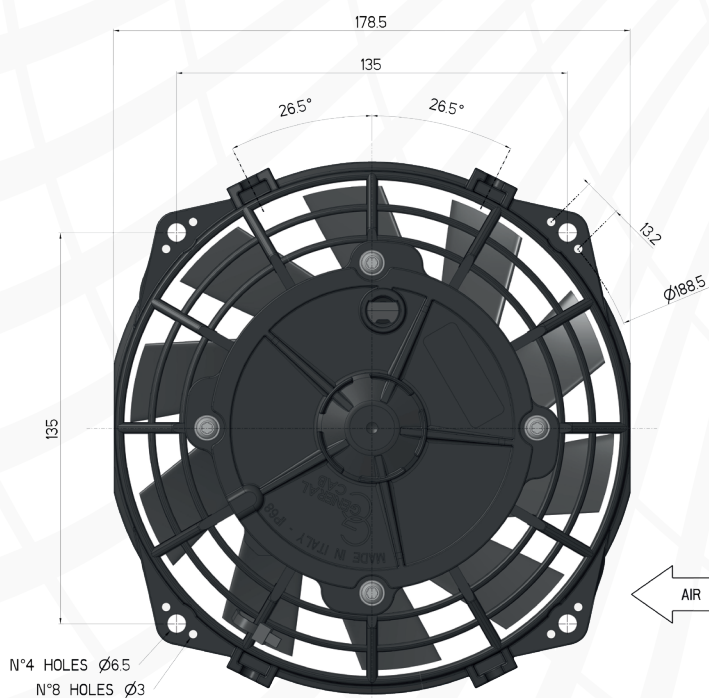

AIR FLOW DIRECTION

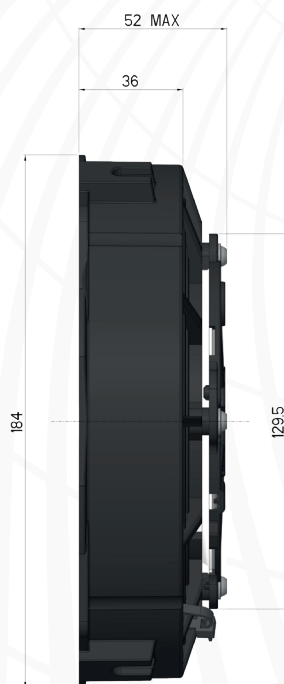

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION