



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0170

Puller/Aspirante



⚡ 24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 120 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	1004	592	4,35	1,0	25	245		5,0	
0,1	2,5	25	939	554	4,36	0,9	22,5	221		4,5	
0,2	5,0	49	876	517	4,35	0,8	20	196		4,0	
0,3	7,5	74	807	476	4,30	0,7	17,5	172		3,5	
0,4	10,0	98	731	431	4,21	0,6	15	147		3,0	
0,5	12,5	123	652	385	4,11	0,5	12,5	123		2,5	
0,6	15,0	147	564	333	4,08	0,4	10	98		2,0	
0,7	17,5	172	471	278	4,18	0,3	7,5	74		1,5	
0,8	20,0	196	386	228	4,33	0,2	5	49		1,0	
0,9	22,5	221	321	189	4,43	0,1	2,5	25		0,5	
1,0	25,0	245	243	143	4,53	0,0	0	0		0	
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP5542						m³/h 0 150 300 450 600 750 900 1050 1200 cfm 0 89 177 266 354 443 531 620 708					

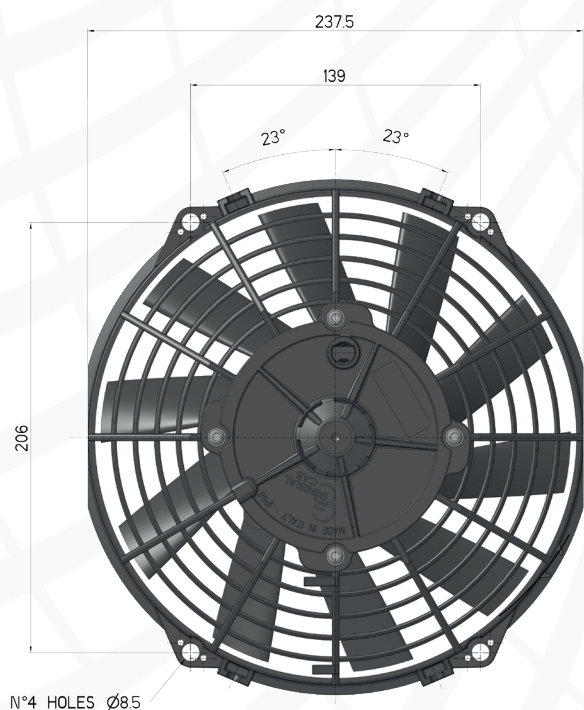

AIR FLOW DIRECTION

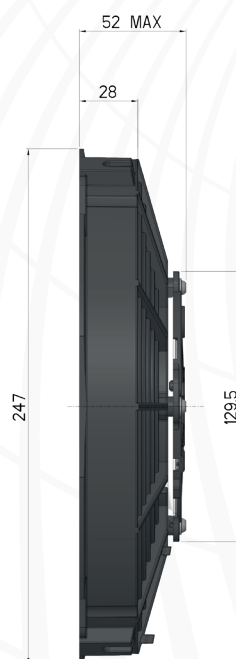

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION