



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0329

Puller/Aspirante



24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 120 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	1004	592	4,35	1,0	25	245		10,0					
0,1	2,5	25	939	554	4,36	0,9	22,5	221		9,0					
0,2	5,0	49	876	517	4,35	0,8	20	196		8,0					
0,3	7,5	74	807	476	4,30	0,7	17,5	172		7,0					
0,4	10,0	98	731	431	4,21	0,6	15	147		6,0					
0,5	12,5	123	652	385	4,11	0,5	12,5	123		5,0					
0,6	15,0	147	564	333	4,08	0,4	10	98		4,0					
0,7	17,5	172	471	278	4,18	0,3	7,5	74		3,0					
0,8	20,0	196	386	228	4,33	0,2	5	49		2,0					
0,9	22,5	221	321	189	4,43	0,1	2,5	25		1,0					
						0,0	0	0		0					
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata									
Rif: BPP5542						m³/h	200	300	400	500	600	700	800	900	1000
						cfm	118	177	236	295	354	413	472	531	590

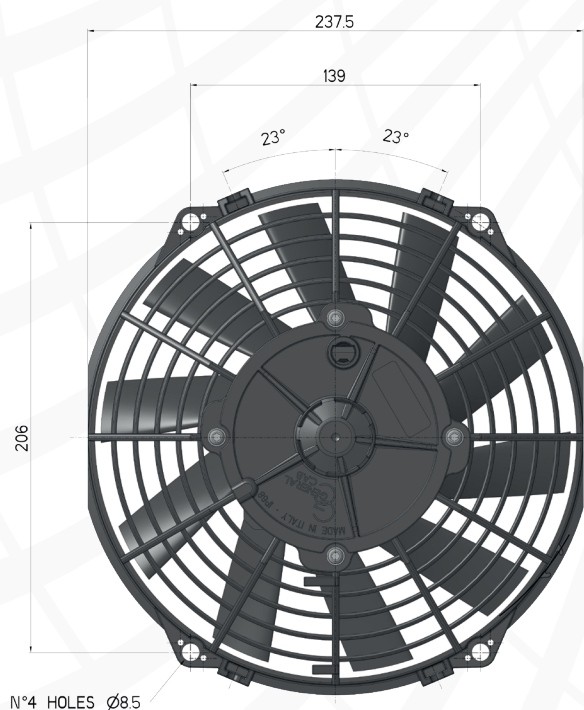

AIR FLOW DIRECTION

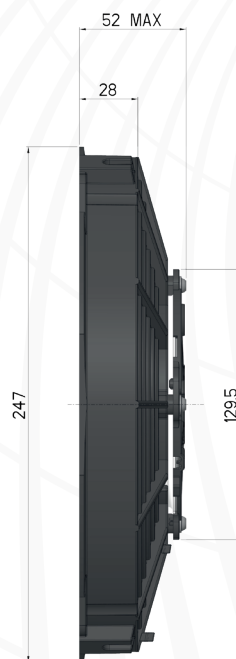

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION