



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE




PN: 9005.0680

Pusher/Soffiante

12 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 115 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente																				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph		A																				
0,0	0,0	0	1006	594	8,07	1,0	25	245			10,0																				
0,1	2,5	25	952	562	8,15	0,9	22,5	221			9,0																				
0,2	5,0	49	883	521	8,13	0,8	20	196			8,0																				
0,3	7,5	74	816	482	8,11	0,7	17,5	172			7,0																				
0,4	10,0	98	737	435	8,11	0,6	15	147			6,0																				
0,5	12,5	123	619	365	8,16	0,5	12,5	123			5,0																				
0,6	15,0	147	542	320	8,32	0,4	10	98			4,0																				
0,7	17,5	172	402	237	8,46	0,3	7,5	74			3,0																				
0,8	20,0	196	268	158	8,55	0,2	5	49			2,0																				
0,9	22,5	221	144	85	8,70	0,1	2,5	25			1,0																				
						0,0	0	0		0																					
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata																									
Rif: BPP4453						<table><tr><td>m³/h</td><td>0</td><td>150</td><td>300</td><td>450</td><td>600</td><td>750</td><td>900</td><td>1050</td><td>1200</td></tr><tr><td>cfm</td><td>0</td><td>89</td><td>177</td><td>266</td><td>354</td><td>443</td><td>531</td><td>620</td><td>708</td></tr></table>						m³/h	0	150	300	450	600	750	900	1050	1200	cfm	0	89	177	266	354	443	531	620	708
m³/h	0	150	300	450	600	750	900	1050	1200																						
cfm	0	89	177	266	354	443	531	620	708																						

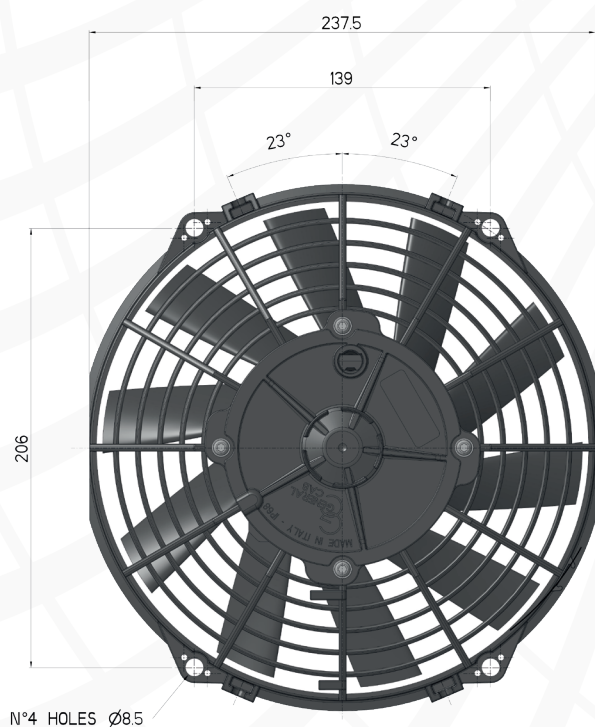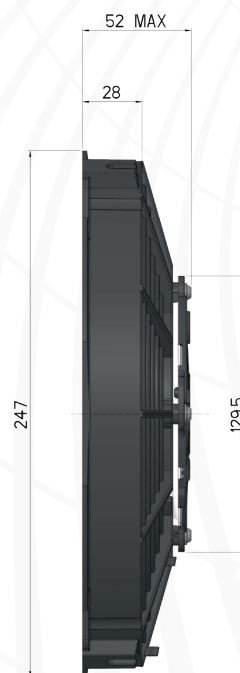

Waterproof Motor IP68
Motore stagno IP68

AMP Connector: 180908
Connettore AMP: 180908

Available with other connectors
Disponibile con altri connettori



DIRECTION OF ROTATION