



255 mm
10 in

AXIAL MOTOR-FAN - ELETTOVENTILATORE ASSIALE

PN: 6005.XXXX

Puller / Pusher

⚡ 24 V
D.C.

MOTOR DIMENSION

DIMENSIONE MOTORE


52 mm

MOTOR TYPE

TIPO MOTORE

AE6407 - Max 150 W

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ² O	mm H ² O	Pa	m³/h	cfm	A	in H ² O	mm H ² O	Pa	Graph		A
0,0	0,0	0	1656	977	5,47	1,0	25	245			10,0
0,1	2,5	25	1587	936	5,49	0,9	22,5	221			9,0
0,2	5,0	49	1504	887	5,62	0,8	20	196			8,0
0,3	7,5	74	1406	829	5,71	0,7	17,5	172			7,0
0,4	10,0	98	1314	775	5,77	0,6	15	147			6,0
0,5	12,5	123	1185	699	5,62	0,5	12,5	123			5,0
0,6	15,0	147	1025	605	5,38	0,4	10	98			4,0
0,7	17,5	172	859	507	5,23	0,3	7,5	74			3,0
0,8	20,0	196	633	374	5,16	0,2	5	49			2,0
0,9	22,5	221	556	328	5,28	0,1	2,5	25			1,0
1,0	25,0	245	489	289	5,50	0,0	0	0			0
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP6285											

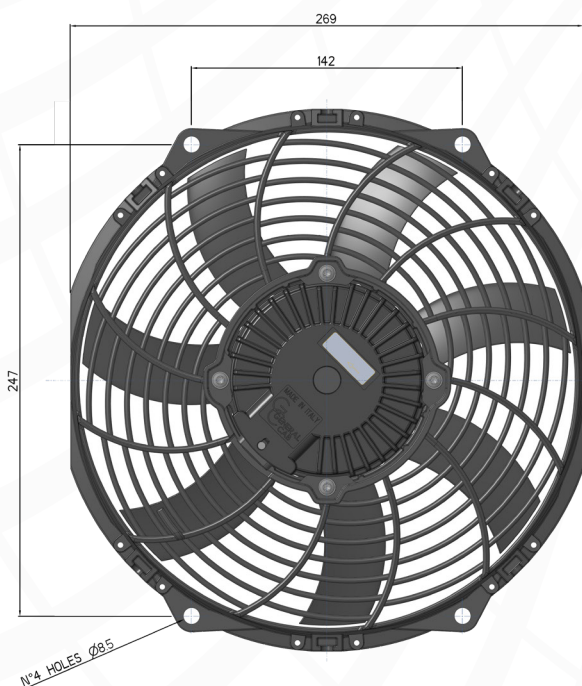

Ingress Protection Grade
IP68, IP6K9K

Grado di protezione
IP68, IP6K9K

Available connectors
AMP, Delphi, YAZAKI

Connettori disponibili
AMP, Delphi, YAZAKI



DIRECTION OF ROTATION