



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE




PN: 9005.0171

Pusher/Soffiante

⚡ 24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 135 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	1080	637	4,91	1,0	25	245		10,0	
0,1	2,5	25	1025	605	4,87	0,9	22,5	221		9,0	
0,2	5,0	49	970	572	4,82	0,8	20	196		8,0	
0,3	7,5	74	910	537	4,79	0,7	17,5	172		7,0	
0,4	10,0	98	851	502	4,76	0,6	15	147		6,0	
0,5	12,5	123	775	457	4,78	0,5	12,5	123		5,0	
0,6	15,0	147	698	412	4,81	0,4	10	98		4,0	
0,7	17,5	172	597	352	4,87	0,3	7,5	74		3,0	
0,8	20,0	196	494	291	4,94	0,2	5	49		2,0	
0,9	22,5	221	373	220	5,00	0,1	2,5	25		1,0	
1,0	25,0	245	248	147	5,06	0,0	0	0		0	
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP4524						m³/h 0 150 300 450 600 750 900 1050 1200 cfm 0 89 177 266 354 443 531 620 708					

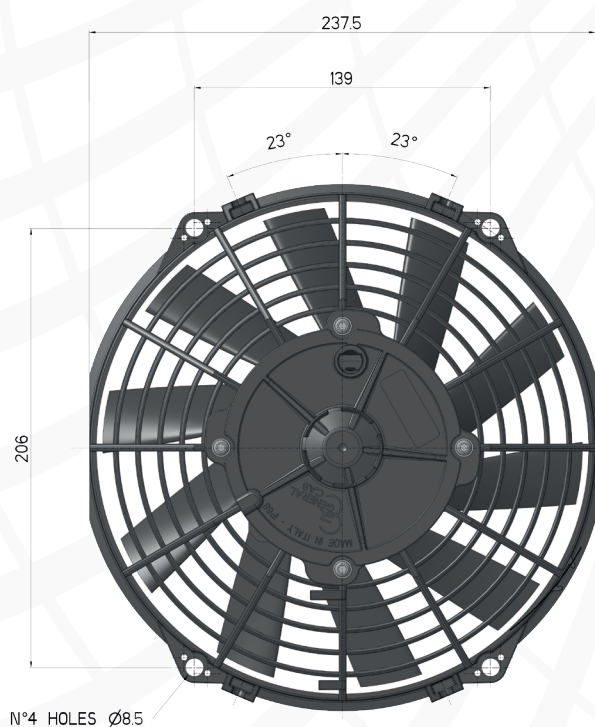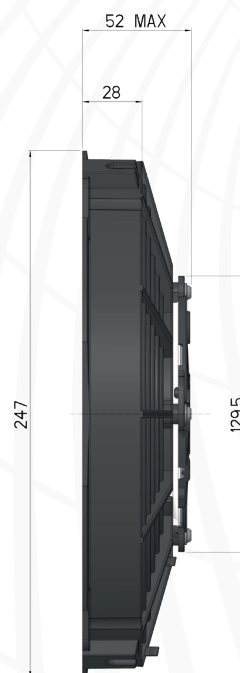

Waterproof Motor IP68
Motore stagno IP68

AMP Connector: 180908
Connettore AMP: 180908

Available with other connectors
Disponibile con altri connettori



DIRECTION OF ROTATION