



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE

PN: 6005.0001

Puller / Pusher

⚡ 24 V
D.C.

MOTOR DIMENSION

DIMENSIONE MOTORE



52 mm

MOTOR TYPE

TIPO MOTORE

AE6407 - Max 150 W

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ² O	mm H ² O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph		A
0,0	0,0	0	976	576	2,32	1,0	25	245			5,0
0,1	2,5	25	902	532	2,43	0,9	22,5	221			4,5
0,2	5,0	49	832	491	2,50	0,8	20	196			4,0
0,3	7,5	74	726	429	2,47	0,7	17,5	172			3,5
0,4	10,0	98	598	353	2,40	0,6	15	147			3,0
0,5	12,5	123	451	266	2,48	0,5	12,5	123			2,5
0,6	15,0	147	387	229	2,62	0,4	10	98			2,0
0,7	17,5	172	322	190	2,75	0,3	7,5	74			1,5
0,8	20,0	196	248	147	2,85	0,2	5	49			1,0
0,9	22,5	221	199	118	2,97	0,1	2,5	25			0,5
1,0	25,0	245	147	87	3,10	0,0	0	0			0
Test Voltage 26V D.C - Tensione di prova 26V D.C						<div>Air Flow Portata</div> <div><div>m³/h</div><div>01252503755006257508751000</div><div>cfm</div><div>074148221295369443516590</div></div>					
Rif: BPP6277											

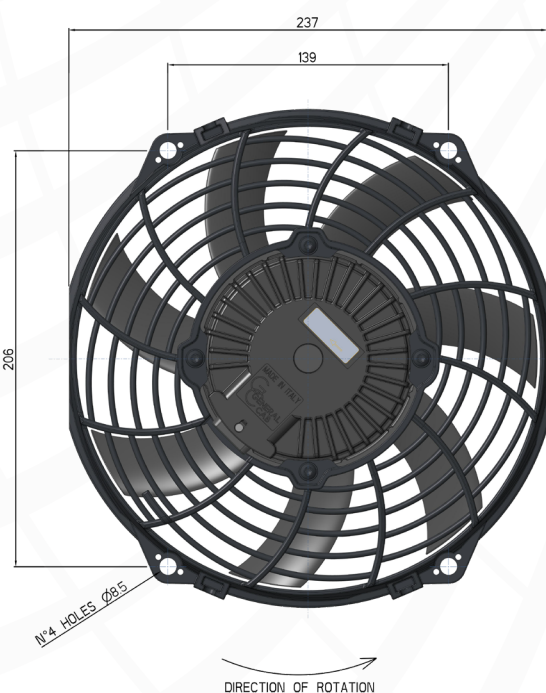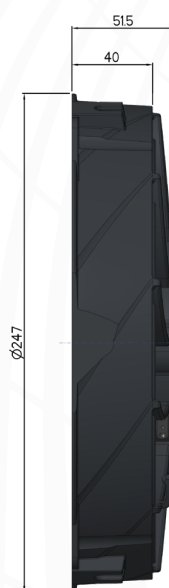

Ingress Protection Grade
IP68, IP6K9K

Grado di protezione
IP68, IP6K9K

Available connectors
AMP, Delphi, YAZAKI

Connettori disponibili
AMP, Delphi, YAZAKI