



167 mm
7 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0161

Pusher/Soffiante

12 V
D.C.


MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 80 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	485	286	5,48	1,0	25	245		10,0					
0,1	2,5	25	454	268	5,51	0,9	22,5	221		9,0					
0,2	5,0	49	423	250	5,53	0,8	20	196		8,0					
0,3	7,5	74	397	234	5,47	0,7	17,5	172		7,0					
0,4	10,0	98	372	219	5,41	0,6	15	147		6,0					
0,5	12,5	123	299	176	5,37	0,5	12,5	123		5,0					
0,6	15,0	147	222	131	5,35	0,4	10	98		4,0					
0,7	17,5	172	184	109	5,51	0,3	7,5	74		3,0					
0,8	20,0	196	153	90	5,70	0,2	5	49		2,0					
0,9	22,5	221	118	69	5,82	0,1	2,5	25		1,0					
						0,0	0	0		0					
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata									
Rif: BPP4505						m³/h	0	75	150	225	300	375	450	525	600
						cfm	0	44	89	133	177	221	266	310	354

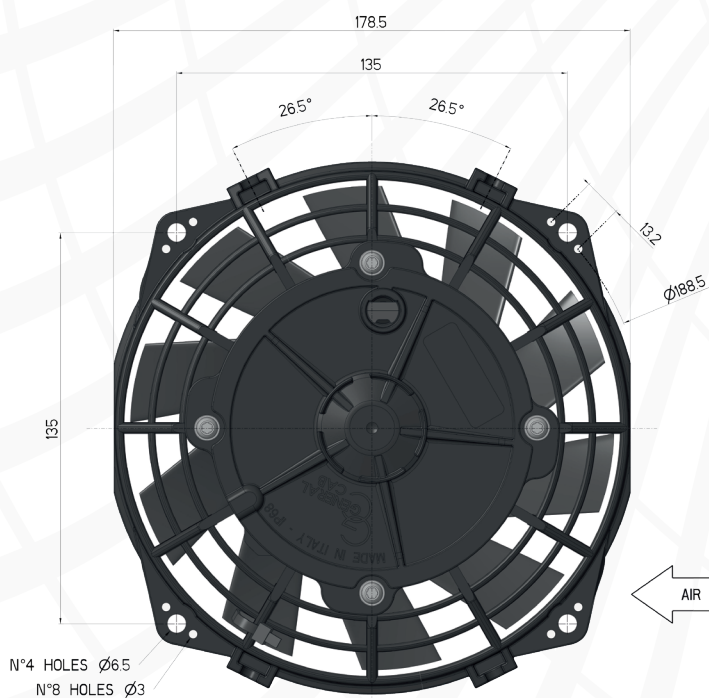

AIR FLOW DIRECTION

DIRECTION OF ROTATION



Waterproof Motor IP68
Motore stagno IP68

AMP Connector: 180908
Connettore AMP: 180908

Available with other connectors
Disponibile con altri connettori