



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0168

Puller/Aspirante



12 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 105 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	960	566	7,43	1,0	25	245		10,0	
0,1	2,5	25	878	518	7,37	0,9	22,5	221		9,0	
0,2	5,0	49	809	477	7,35	0,8	20	196		8,0	
0,3	7,5	74	727	429	7,18	0,7	17,5	172		7,0	
0,4	10,0	98	645	380	6,98	0,6	15	147		6,0	
0,5	12,5	123	558	329	6,94	0,5	12,5	123		5,0	
0,6	15,0	147	489	289	7,23	0,4	10	98		4,0	
0,7	17,5	172	403	238	7,49	0,3	7,5	74		3,0	
0,8	20,0	196	309	182	7,59	0,2	5	49		2,0	
0,9	22,5	221	224	132	7,90	0,1	2,5	25		1,0	
						0,0	0	0		0	
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata					
Rif: BPP5099						<div><div></div><div>m³/h01252503755006257508751000</div><div>cfm074148221295369443516590</div></div>					

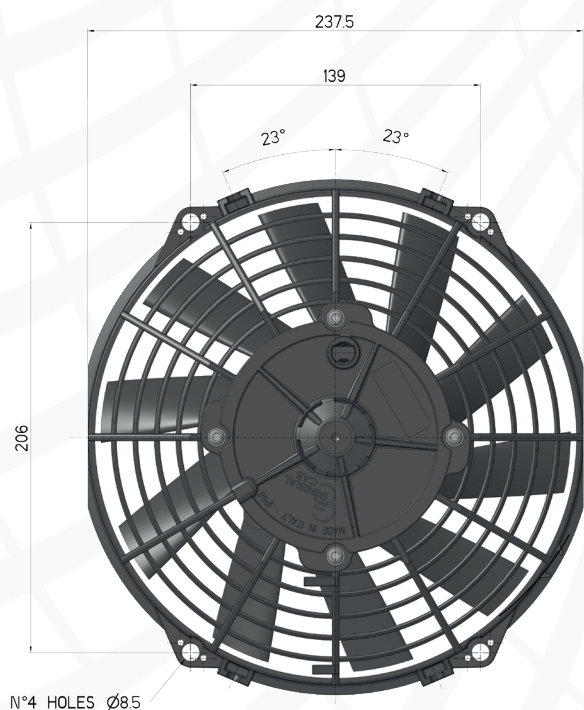

AIR FLOW DIRECTION

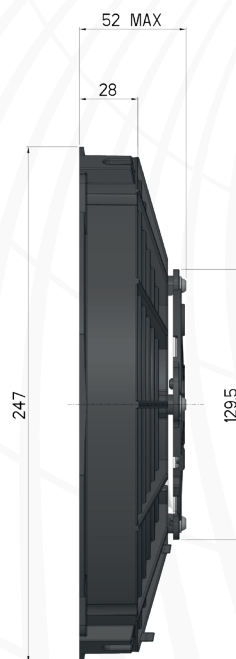

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION