



255 mm
10 in

AXIAL MOTOR-FAN - ELETTOVENTILATORE ASSIALE

PN: 9005.0173




Pusher/Soffiante

12 V
D.C.

MOTOR DIMENSION DIMENSIONE MOTORE 52 mm

MOTOR TYPE TIPO MOTORE AM8608 - 80 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph		A
0,0	0,0	0	1133	668	5,72	0,6	15	147			10,0
0,1	2,5	25	1044	616	5,91	0,5	13,5	132			9,0
0,2	5,0	49	941	555	5,90	0,5	12	118			8,0
0,3	7,5	74	837	494	5,85	0,4	10,5	103			7,0
0,4	10,0	98	641	378	5,88	0,4	9	88			6,0
0,5	12,5	123	451	266	5,98	0,3	7,5	74			5,0
0,6	15,0	147	278	164	5,97	0,2	6	59			4,0
						0,2	4,5	44			3,0
						0,1	3	29			2,0
						0,1	1,5	15			1,0
						0,0	0	0			0
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata					
Rif: BPP4527						m³/h 0 150 300 450 600 750 900 1050 1200 cfm 0 89 177 266 354 443 531 620 708					

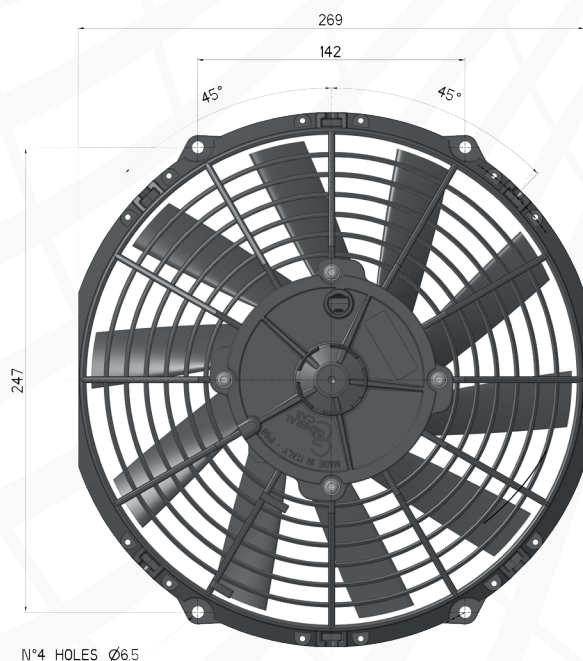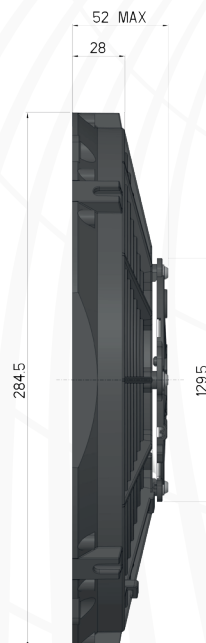

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

AIR FLOW DIRECTION

DIRECTION OF ROTATION