



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0209

Puller/Aspirante



12 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 100 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	926	546	6,78	1,0	25	245		10,0					
0,1	2,5	25	857	505	6,83	0,9	22,5	221		9,0					
0,2	5,0	49	783	462	6,77	0,8	20	196		8,0					
0,3	7,5	74	702	414	6,66	0,7	17,5	172		7,0					
0,4	10,0	98	624	368	6,53	0,6	15	147		6,0					
0,5	12,5	123	538	318	6,60	0,5	12,5	123		5,0					
0,6	15,0	147	470	277	6,89	0,4	10	98		4,0					
0,7	17,5	172	381	225	7,06	0,3	7,5	74		3,0					
0,8	20,0	196	273	161	7,21	0,2	5	49		2,0					
0,9	22,5	221	208	122	7,40	0,1	2,5	25		1,0					
						0,0	0	0		0					
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata									
Rif: BPP4039						m³/h	0	125	250	375	500	625	750	875	1000
						cfm	0	74	148	221	295	369	443	516	590

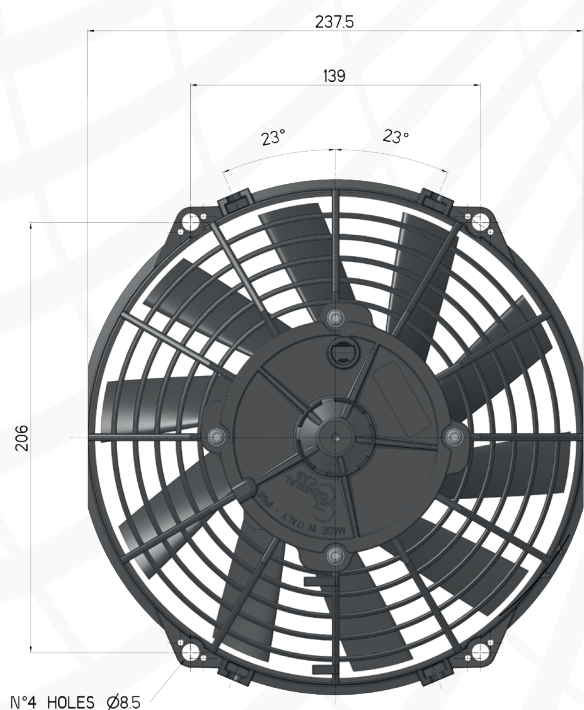

AIR FLOW DIRECTION

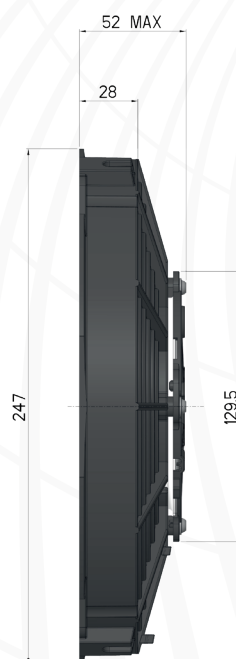

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION