



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE




PN: 9005.0300

Pusher/Soffiante

⚡ 24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 110 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	992	585	3,76	1,0	25	245		10,0					
0,1	2,5	25	933	550	3,84	0,9	22,5	221		9,0					
0,2	5,0	49	870	513	3,86	0,8	20	196		8,0					
0,3	7,5	74	800	472	3,87	0,7	17,5	172		7,0					
0,4	10,0	98	717	423	3,89	0,6	15	147		6,0					
0,5	12,5	123	615	363	3,97	0,5	12,5	123		5,0					
0,6	15,0	147	547	323	4,01	0,4	10	98		4,0					
0,7	17,5	172	422	249	4,09	0,3	7,5	74		3,0					
0,8	20,0	196	303	179	4,20	0,2	5	49		2,0					
0,9	22,5	221	166	98	4,18	0,1	2,5	25		1,0					
						0,0	0	0		0					
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata									
Rif: BPP5555						m³/h	0	150	300	450	600	750	900	1050	1200
						cfm	0	89	177	266	354	443	531	620	708

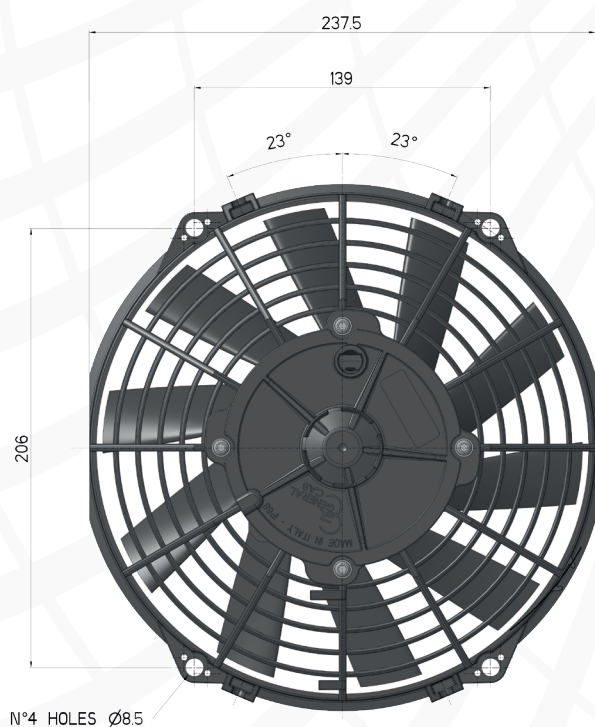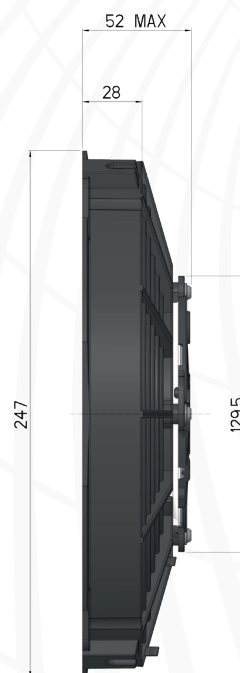

Waterproof Motor IP68
Motore stagno IP68

AMP Connector: 180908
Connettore AMP: 180908

Available with other connectors
Disponibile con altri connettori



DIRECTION OF ROTATION