



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0451

Puller/Aspirante



12 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	81 mm
MOTOR TYPE	TIPO MOTORE	AM8622 - 140 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	1173	692	10,42	1,0	25	245		15,0	
0,1	2,5	25	1092	644	10,35	0,9	22,5	221		13,5	
0,2	5,0	49	1011	597	10,28	0,8	20	196		12,0	
0,3	7,5	74	892	526	9,90	0,7	17,5	172		10,5	
0,4	10,0	98	773	456	9,52	0,6	15	147		9,0	
0,5	12,5	123	694	410	9,50	0,5	12,5	123		7,5	
0,6	15,0	147	616	363	9,48	0,4	10	98		6,0	
0,7	17,5	172	543	320	9,83	0,3	7,5	74		4,5	
0,8	20,0	196	469	277	10,18	0,2	5	49		3,0	
0,9	22,5	221	379	224	10,39	0,1	2,5	25		1,5	
1,0	25,0	245	288	170	10,60	0,0	0	0		0	
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata					
Rif: BPP4950						m³/h 0 150 300 450 600 750 900 1050 1200 cfm 0 89 177 266 354 443 531 620 708					

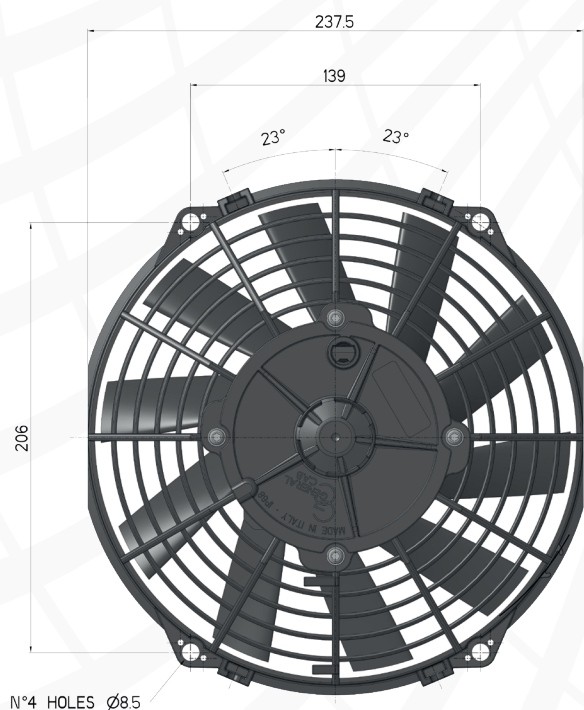

AIR FLOW DIRECTION

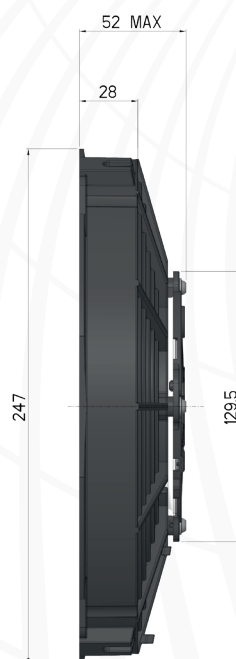

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION