



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE




PN: 9005.0505

Pusher/Soffiante

12 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	52 mm
MOTOR TYPE	TIPO MOTORE	AM8608 - 110 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	999	590	7,81	1,0	25	245		10,0					
0,1	2,5	25	940	554	7,83	0,9	22,5	221		9,0					
0,2	5,0	49	880	519	7,85	0,8	20	196		8,0					
0,3	7,5	74	800	472	7,81	0,7	17,5	172		7,0					
0,4	10,0	98	720	425	7,77	0,6	15	147		6,0					
0,5	12,5	123	629	371	7,88	0,5	12,5	123		5,0					
0,6	15,0	147	539	318	7,99	0,4	10	98		4,0					
0,7	17,5	172	390	230	8,04	0,3	7,5	74		3,0					
0,8	20,0	196	240	142	8,09	0,2	5	49		2,0					
0,9	22,5	221	125	74	8,21	0,1	2,5	25		1,0					
						0,0	0	0		0					
Test Voltage 13V D.C - Tensione di prova 13V D.C						Air Flow Portata									
Rif: BPP5599						m³/h	0	150	300	450	600	750	900	1050	1200
						cfm	0	89	177	266	354	443	531	620	708

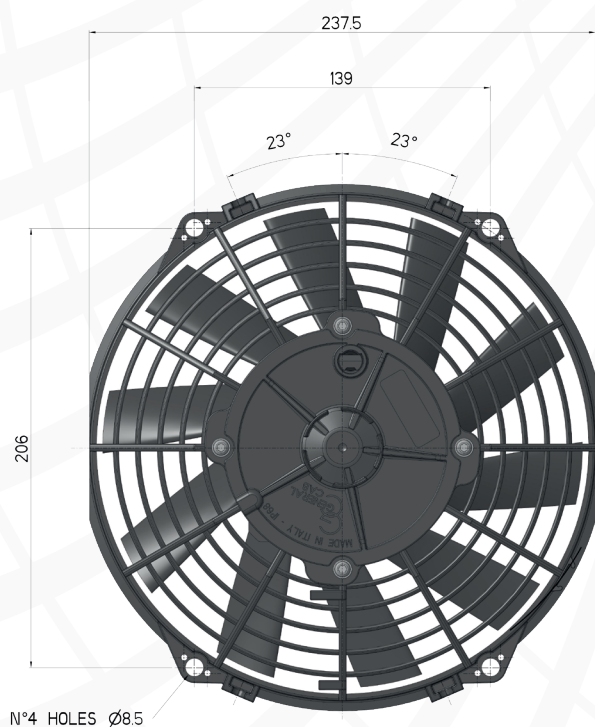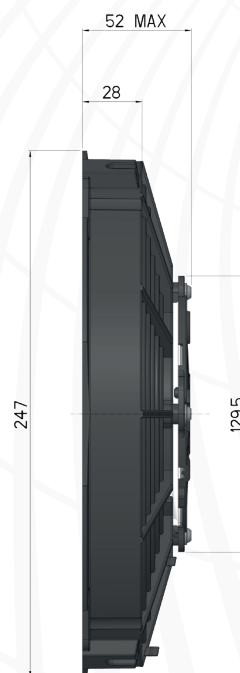

Waterproof Motor IP68
Motore stagno IP68

AMP Connector: 180908
Connettore AMP: 180908

Available with other connectors
Disponibile con altri connettori



DIRECTION OF ROTATION