



225 mm
9 in

AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE


PN: 9005.0657

Puller/Aspirante



⚡ 24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	63 mm
MOTOR TYPE	TIPO MOTORE	AM8612 - 140 Watt

Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A	
0,0	0,0	0	1080	637	4,95	1,0	25	245		10,0	
0,1	2,5	25	1040	614	5,04	0,9	22,5	221		9,0	
0,2	5,0	49	978	577	5,08	0,8	20	196		8,0	
0,3	7,5	74	916	540	5,05	0,7	17,5	172		7,0	
0,4	10,0	98	840	496	4,99	0,6	15	147		6,0	
0,5	12,5	123	779	460	4,90	0,5	12,5	123		5,0	
0,6	15,0	147	709	419	4,75	0,4	10	98		4,0	
0,7	17,5	172	638	376	4,91	0,3	7,5	74		3,0	
0,8	20,0	196	580	342	5,09	0,2	5	49		2,0	
0,9	22,5	221	515	304	5,26	0,1	2,5	25		1,0	
						0,0	0	0		0	
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata					
Rif: BPP4615						m³/h 500 600 700 800 900 1000 1100 1200 1300 cfm 295 354 413 472 531 590 649 708 767					

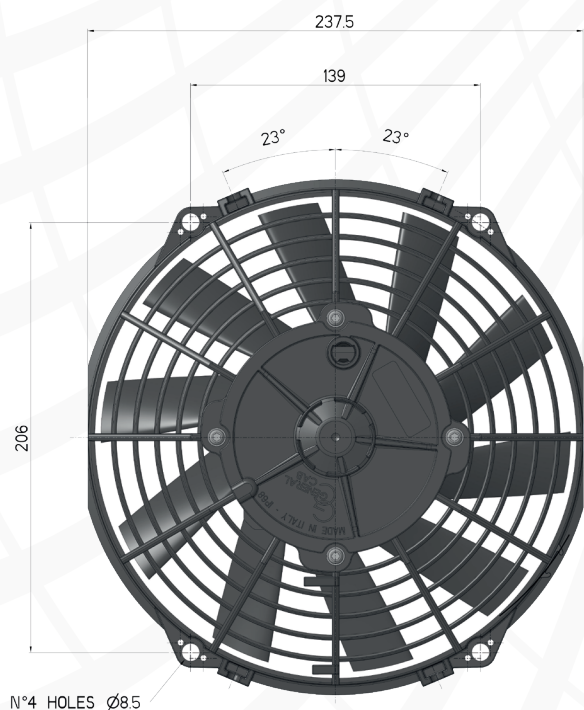

AIR FLOW DIRECTION

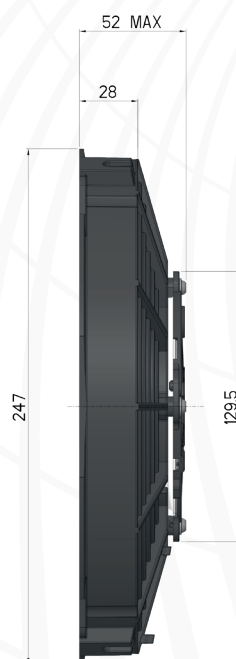

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION