



225 mm
9 in


AXIAL MOTOR-FAN - ELETTROVENTILATORE ASSIALE




PN: 9005.0658

Pusher/Soffiante

⚡ 24 V
D.C.

MOTOR DIMENSION	DIMENSIONE MOTORE	63 mm
MOTOR TYPE	TIPO MOTORE	AM8612 - 110 Watt

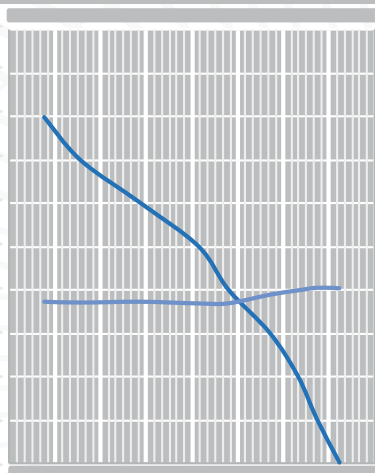Static Pressure Pressione Statica			Airflow Portata		Current Corrente	Static Pressure Pressione Statica			Performance Prestazione		Current Corrente				
in H ₂ O	mm H ₂ O	Pa	m³/h	cfm	A	in H ₂ O	mm H ₂ O	Pa	Graph	A					
0,0	0,0	0	1083	639	4,04	1,0	25	245		10,0					
0,1	2,5	25	1010	596	4,05	0,9	22,5	221		9,0					
0,2	5,0	49	947	559	4,00	0,8	20	196		8,0					
0,3	7,5	74	855	504	3,90	0,7	17,5	172		7,0					
0,4	10,0	98	719	424	3,70	0,6	15	147		6,0					
0,5	12,5	123	622	367	3,70	0,5	12,5	123		5,0					
0,6	15,0	147	433	255	3,74	0,4	10	98		4,0					
0,7	17,5	172	234	138	3,72	0,3	7,5	74		3,0					
0,8	20,0	196	114	67	3,74	0,2	5	49		2,0					
						0,1	2,5	25		1,0					
						0,0	0	0	0						
Test Voltage 26V D.C - Tensione di prova 26V D.C						Air Flow Portata									
Rif: BPP4934						m³/h	0	150	300	450	600	750	900	1050	1200
						cfm	0	89	177	266	354	443	531	620	708

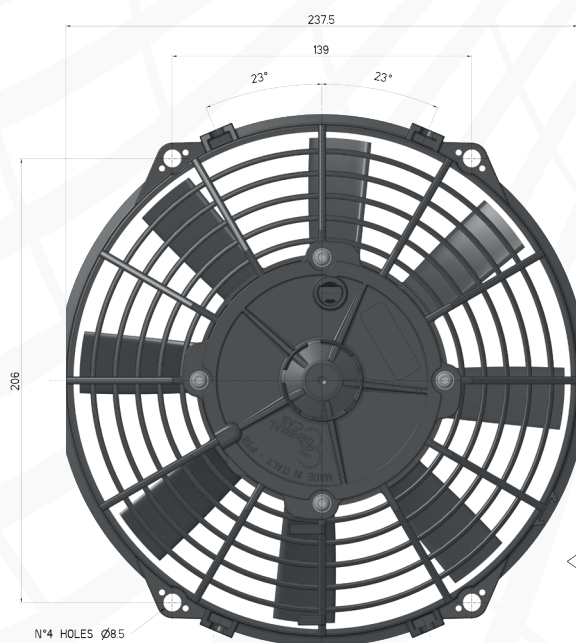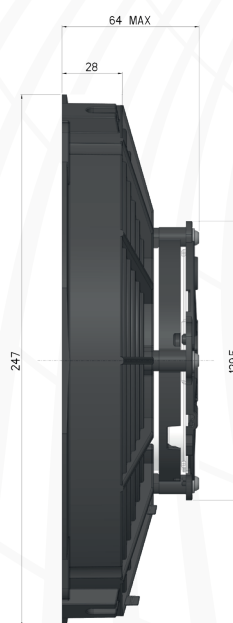

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

DIRECTION OF ROTATION